




G10









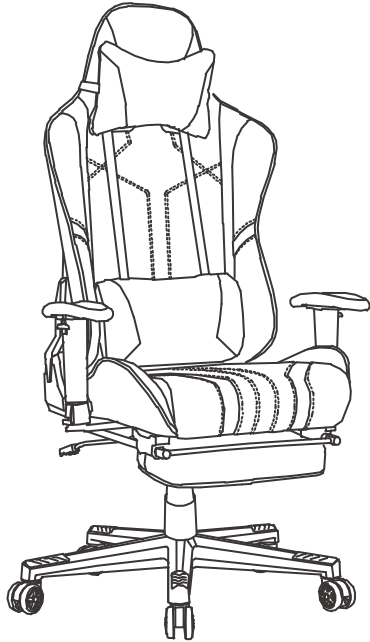






PRODUCT INSTALLATION GUIDE



Product size: 69*69*126(135)CM




Accessories list (subject to actual size, each type of screw has extra for spare)

 Castor*5	 Base*1	 Mechanism*1	 Armrest*2	 CAP*1
<i>with/without footrest</i>  Seat cushion*1	 Backrest*1	 Headrest*1	 Waist Pillow*1	 Gas lift*1
 Decorative cover *4+1	 Screw+Spring cushion+ Gasket (M8*25) *16+1	 Decorative cover screw (M5*10) *2+1	 Wrench*1	 Back decorative cover*2

Note: Before installing the chair, please sort the screws and measure the length of the screws for installation.



Installation diagram (subject to actual size)

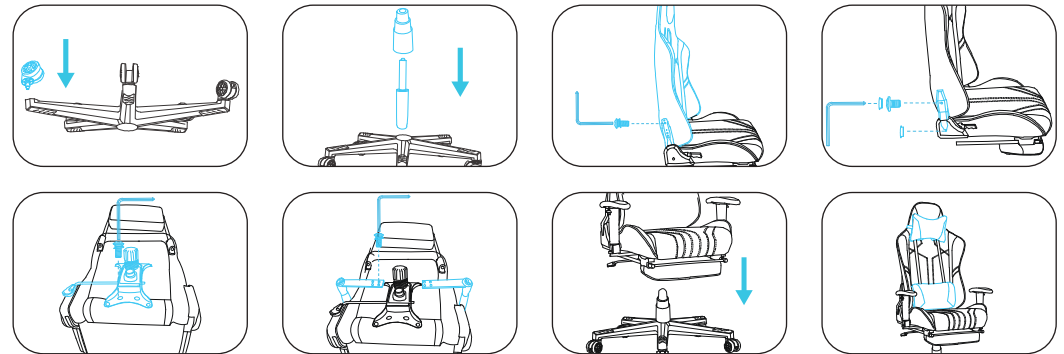

1. Put the castor into the base by pressing;
2. Insert the gas lift to the base, put the CAP into the gas lift one by one;
3. 4*(M8*25) screws and spring cushion and gaskets to connect the seat cushion and backrest;
4. Install the decorative cover to the backrest with 2*(M5*10) decorative cover screws, then cover the decorative cover;
5. 4*(M8*25) screws and gaskets to connect the seat cushion and mechanism;
6. 8*(M8*25) screws and gaskets to connect the seat cushion and armrest;
7. Put the upper part of chair to the gas lift;
8. Install the headrest and waist pillow on the backrest, and the chair installation is complete.