

H7C





Installation guide





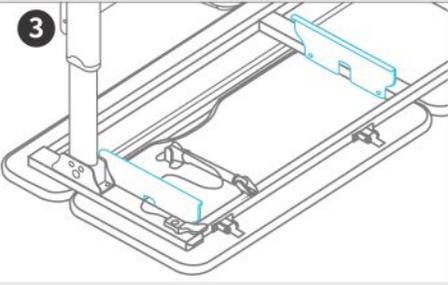
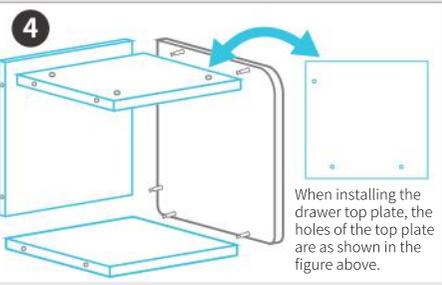


! NOTE: All accessories, please be careful not to be swallowed by children.

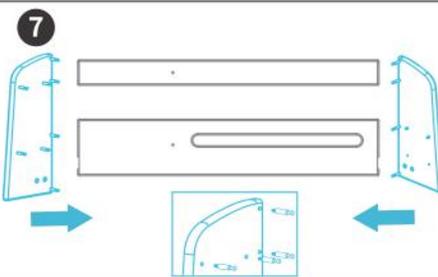
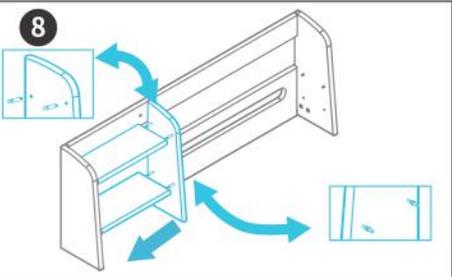
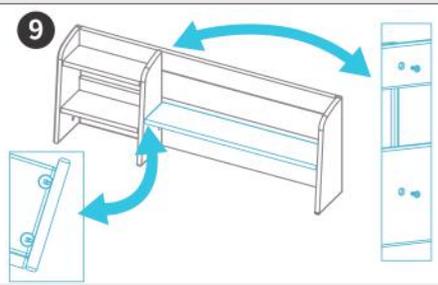
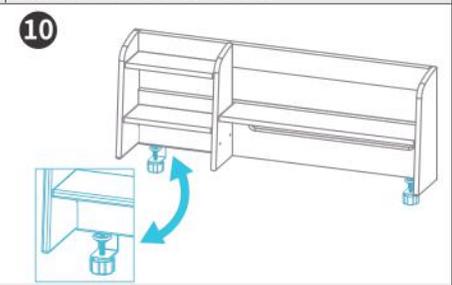
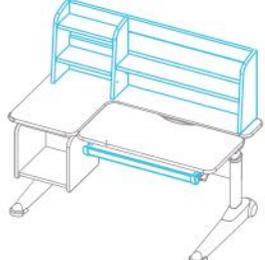
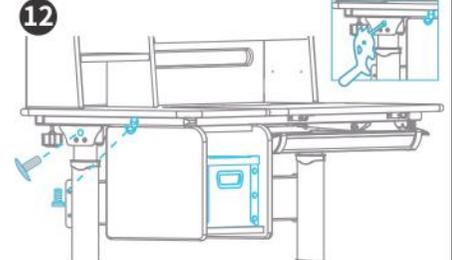
Accessories table

(subject to actual size; each type of screw is equipped with extra screws; unit: piece/piece/set)

 <p>Bookshelf side panel*3</p>		 <p>Plastic drawer*1</p>		 <p>Drawer top plate*1 Drawer bottom plate*1</p>		 <p>Drawer backboard*1</p>					
 <p>Drawer side panel*2</p>		 <p>Hardware legs*2</p>		 <p>Drawer storage box*1</p>							
 <p>Plastic drawer bracket*2</p>		 <p>Hexagonal rib*1</p>		 <p>Desktop Board*1</p>							
 <p>Backboard on bookshelf*1</p>		 <p>Lower backboard of bookshelf*1</p>		 <p>Large layer board *1</p>							
 <p>Small shelf 1 *1</p>		 <p>Small shelf 2 *1</p>		 <p>Table leg connecting plate*1</p>		 <p>Shelf support*5</p>		 <p>Shelf support screw*5</p>			
 <p>M6*14 screw*18</p>		 <p>M7*40 screw*3</p>		 <p>M6*30 screw*8</p>		 <p>M4*10 screw*3</p>		 <p>Hook*1</p>		 <p>Phillips screwdriver*1</p>	
 <p>Left and right bookshelf corner code*2</p>		 <p>Awl nut*5</p>		 <p>Screw *31</p>		 <p>Lock handle*31</p>		 <p>Rubber plug*2</p>			
 <p>Lifting regulator*1</p>											

Installation diagram (subject to actual size)

<p>1</p>  <p>Note: The side of the table legs with the sticker faces outward.</p>	<p>2</p>  <p>The slot of the cone nut must be exposed.</p>
<p>Install the left and right table legs to the desktop board assembly with 8 M6*14 screws (the long end of the table legs is in the same direction as the handle).</p>	<p>1. Insert the hexagonal ribs into the hexagonal holes of the left and right legs (screws can be loosened); 2. Put 4 taper nuts into the table leg connection plate, and then use 4 M6*30 screws to tighten to the awl nut (note: the hole of the connection plate faces forward).</p>
<p>3</p> 	<p>4</p>  <p>When installing the drawer top plate, the holes of the top plate are as shown in the figure above.</p>
<p>Use four M6*14 screws to install the drawer bracket on the desktop board assembly (note: to match the installation, the direction of the guide rail pull out is consistent with the hinge, the cable of the damper needs to pass through the recessed hole of the drawer bracket.)</p>	<p>Install the screws of the two drawer side plates, and then install the drawer top plate, bottom plate, and back plate to the right side plate of the drawer respectively (Note: the back plate hole is facing backward, the bottom plate hole is facing down, the lock handle is first Do not tighten).</p>
<p>5</p> 	<p>6</p> 
<p>Install the left side panel of the drawer and tighten all the lock handles.</p>	<p>Install the drawer on the desktop rack: tighten with 3 6*30 screws to check whether all screws have been tightened.</p>

<p>7</p> 	<p>8</p> 
<p>Bookshelf installation: 1. Install 8 screws on the left outer plate and 4 on the right outer plate. Screw and 2 shelf support screws; 2. Install the left and right outer panels to the upper and lower back panels with 8 locking handles.</p>	<p>1. Install 4 screws on the left side of the middle side panel and 2 screws on the right side of the shelf; 2. Install the small-layer board 1 and the small-layer board 2 to the left outer board; 3. Install the middle side plate to the upper left and lower plates and fix it with 8 lock handles.</p>
<p>9</p> 	<p>10</p> 
<p>1. The back of the middle side panel is fixed with 2 M7*40 screws; 2. Install 4 shelf supports to the large shelf, and install the large shelf to the book Shelf.</p>	<p>Use M6*14 screws to install the left and right bookshelf corner codes to the bookshelf side panel and tighten.</p>
<p>11</p> 	<p>12</p> 
<p>1. Place the bookshelf on the table and tighten the bookshelf knob; 2. Insert the plastic drawer into the drawer rail.</p>	<p>1. Use two M4*10 screws to install the hook to the desktop component; 2. After the storage box is installed according to the instructions, put it in a wooden drawer; 3. Install the two rubber plugs into the left and right hand shaking holes, and the table installation is completed; (Reminder: When the table needs to be adjusted up and down, first remove the rubber plug, then put in the lifting regulator.)</p>